

AV710

IP65 MIL-STD-810G Rugged Computer
with Intel® Core i7-6822EQ,
9V to 36V DC-in, Extended Temp
-40 to 70°C



Safety information

Electrical safety

- To prevent electrical shock hazard, disconnect the power cable from the electrical outlet before relocating the system.
- When adding or removing devices to or from the system, ensure that the power cables for the devices are unplugged before the signal cables are connected. If possible, disconnect all power cables from the existing system before you add a device.
- Before connecting or removing signal cables from the motherboard, ensure that all power cables are unplugged.
- Seek professional assistance before using an adapter or extension cord. These devices could interrupt the grounding circuit.
- Make sure that your power supply is set to the correct voltage in your area.
- If you are not sure about the voltage of the electrical outlet you are using, contact your local power company.
- If the power supply is broken, do not try to fix it by yourself. Contact a qualified service technician or your local distributor.

Operation safety

- Before installing the motherboard and adding devices on it, carefully read all the manuals that came with the package.
- Before using the product, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- To avoid short circuits, keep paper clips, screws, and staples away from connectors, slots, sockets and circuitry.
- Avoid dust, humidity, and temperature extremes. Do not place the product in any area where it may become wet.
- Place the product on a stable surface.
- If you encounter any technical problems with the product, contact your local distributor

Statement

- All rights reserved. No part of this publication may be reproduced in any form or by any means, without prior written permission from the publisher.
- All trademarks are the properties of the respective owners.
- All product specifications are subject to change without prior notice

Revision History

Revision	Date (yyyy/mm/dd)	Changes
Version 1.0	2019/05/23	Initial release

Packing list

- AV710 Rugged Fanless System
- CD (Driver + Quick Installation Guide)

Ordering information

Model Number	Description
AV710	IP65 MIL-STD-810G Rugged Computer with Intel® Core i7-6822EQ, 9V to 36V DC-in, Extended Temp -40 to 70°C



If any of the above items is damaged or missing, please contact your local distributor.

Table Contents

SAFETY INFORMATION	1
ELECTRICAL SAFETY	1
OPERATION SAFETY	1
STATEMENT	1
REVISION HISTORY	2
PACKING LIST	2
ORDERING INFORMATION	2
TABLE CONTENTS	3
CHAPTER 1: PRODUCT INTRODUCTION	3
1.1 KEY FEATURES.....	4
1.2 DIMENSIONS	5
1.3 PANEL COMPONENT	6
CHAPTER 2: CONNECTOR PIN DEFINITION	6
2.1 DC-IN	6
2.2 LAN	7
2.3 USB	7
2.4 COM	7
2.5 VGA	8


Chapter 1: Product Introduction

1.1 Key Features


System	
CPU	Intel® Core™ i7-6822EQ Processor (8M Cache, up to 2.80 GHz)
Memory Type	2 x DDR4 SO-DIMM up to 32GB
BIOS	AMI® BIOS
Storage Device	1 x 2.5" SATA SSD
Front I/O	
DC-In	1 (Amphenol TV07RW-11-54P)
Power Button	1 x Power Button with LED backlight
Ground Screw	1 (M4)
Rear I/O	
X1	1 x LAN (Amphenol TV07RW-13-98S)
X2	1 x LAN (Amphenol TV07RW-13-98S)
X3	2 x USB (Amphenol TV07RW-13-98S)
X4	2 x COM (Amphenol TV07RW-13-35S)
X5	1 x VGA (Amphenol TV07RW-13-98S)
Mechanical & Environment	
Construction	Aluminum chassis with fanless design
Power Requirements	9V to 36V DC-in
Dimension (W x H x D)	230 x 83 x 280mm (9.06" x 3.27" x 11.02")
Operating Temp.	-40 to 70°C (ambient with 0.7m/s airflow)
Storage Temp.	-40 to 85°C
Relative Humidity	5% to 95%, non-condensing

* Specifications are subject to change without notice*

1.2 Dimensions

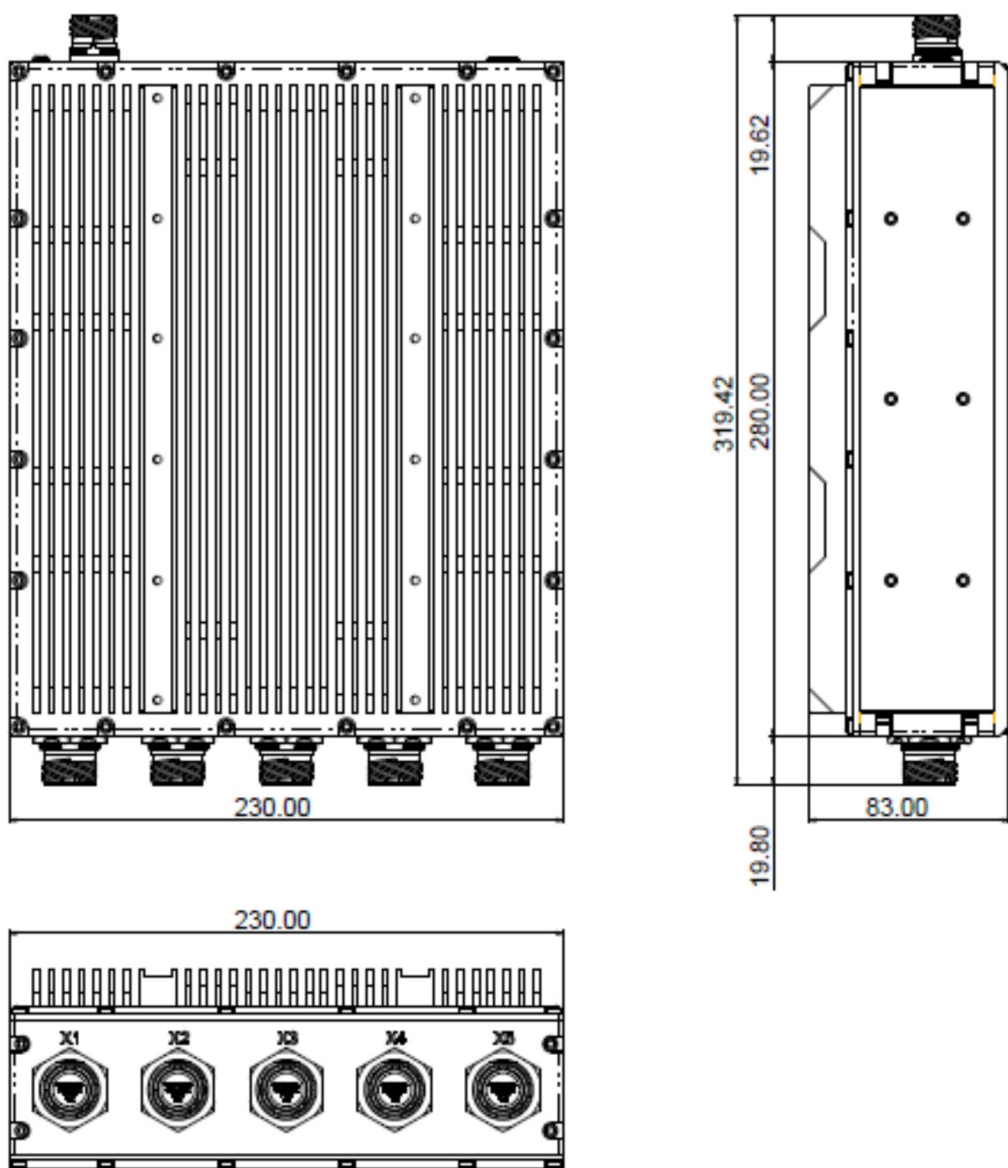

1.3 Panel Component

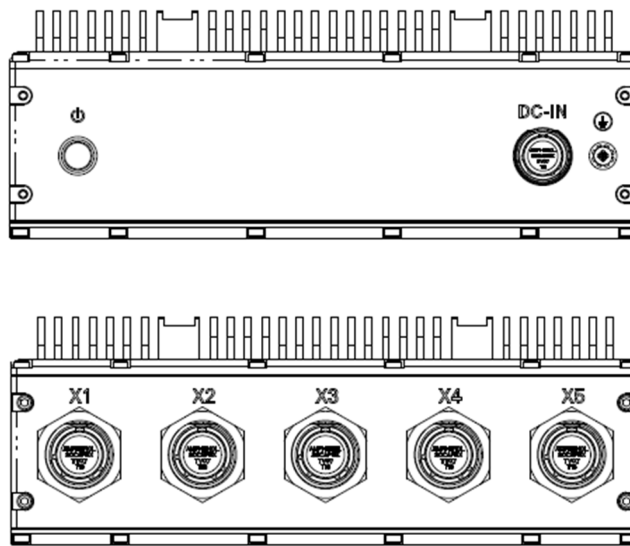

DC-IN	DC-IN 9-36V
X1	1 x Gigabit Ethernet Port
X2	1 x Gigabit Ethernet Port
X3	2 x USB2.0 Ports
X4	2 x RS232 Ports
X5	1 x VGA Port

Chapter 2: Connector pin definition

2.1 DC-IN


Pin	Definition	
A	V+	
B	V+	
C	V-	
F	V-	

2.2 LAN (X1, X2)

Pin	Signal	
A	D0+	
B	D0-	
C	D1+	
D	D1-	
E	D2+	
F	D2-	
G	D3+	
H	D3-	
J	NC	
K	NC	


2.3 USB (X3)

Pin	Signal
A	VCC
B	Data -
C	Data +
D	GND
E	VCC
F	Data -
G	Data +
H	GND
J	NC
K	NC




2.3 USB (X3)

Pin	Signal
A	VCC
B	Data -
C	Data +
D	GND
E	VCC
F	Data -
G	Data +
H	GND
J	NC
K	NC



2.4 COM (X4)

Pin	Signal	Pin	Signal
1	DCD	11	DCD
2	RXD	12	RXD
3	TXD	13	TXD
4	DTR	14	DTR
5	GND	15	GND
6	DSR	16	DSR
7	RTS	17	RTS
8	CTS	18	CTS
9	RI	19	RI
10	GND	20	GND
21	GND		
22	GND		



2.5 VGA (X5)

Pin	Signal
A	RED
B	GREEN
C	BLUE
D	Ground
E	V-Sync
F	H-Sync
G	SCL
H	SDA
J	+5Vcc
K	Ground

