



LAND



SEA



AIR

AV600-THT

Military IP66 Mission GPU Computer



- MIL-STD 810 Thermal, shock, vibration, Humidity / EMI / EMC conditions
- IP65 Chassis with D38999 connectors
- Intel® Tiger Lake-H Processors, up to 8 cores
- Up to 96GB DDR4 SO-DIMM, non-ECC and ECC
- NVIDIA RTX™ A4500 8GB/16GB GDDR6 memory
5888 CUDA cores
- IP65 2 x 2.5" SATA SSD Easy Swap Tray
- MIL-STD-461 18V~36V DC-Input
- Extreme Temperature : -40 ~+70 degree

Special Request:

- Frame Grabber : 4xCH HD-SDI
- Discrete IO : 4xDI 4xDO
- Conformal coating on electronics



Specifications

System

CPU	Intel® 11 gen. Tiger Lake-H Processors, up to 8 cores, integrated Intel® UHD Graphics (Xe architecture)
Memory type	Up to 96GB DDR4 SO-DIMM, non-ECC and ECC
CHIPSET	Intel® RM590E (support ECC, with Xeon CPU) /QM580E
GPU	NVIDIA RTX™ A4500 GA104-955 GPU 8GB/16GB GDDR6 memory, 5888 CUDA cores
On Board Storage	Soldered 64 GB NVMe
Expansion Slot	2 x Full-size mini PCIe (1 with mSATA supported) -1 with mSATA/USB2.0/PCIeX1 support -1 with SIM/USB2.0/PCIeX1 support 1 x 2280 M key (SATA only)

Storage

SATA	2 x 2.5" SSD, Hot Swappable SSD/HDD slot
M.2	1 x 2280 M key (SATA only)

Ethernet

Ethernet (Internal)	2 x 10/100/1000 Ethernet Ports
---------------------	--------------------------------

Front I/O

X1	1 x DVI + 2 x COM +USB2.0 , with D38999 connector
X2	4 x Giga LAN , with D38999 connector
X3	1 x USB3.0 , with D38999 connector
X4	1 x USB3.0 , with D38999 connector
X5	1 x DC-in , with D38999 connector
LED	1 x SSD/HDD LED indicator
switch	1 x IP65 power button , with LED indicator
SSD	2 x 2.5" Easy swap SSD Tray

Power

Power input	MIL-STD-461 18V~36V DC-Input
-------------	------------------------------

Operating System

OS	Windows® 10 64-bit / Linux (support by request)
----	---

Physical

Dimension	246(L) x 313.5 (W) x 100 (H)mm
Weight	(TBD)
Chassis	SECC
Heatsink	Heatsink Aluminum Alloy, Corrosion Resistant

Environmental

Green Product	RoHS, WEEE compliance
Operating Temp.	-20 to 55°C
Storage Temp.	-40 to 85°C
Relative Humidity	5% to 95%, non-condensing

MIL-STD-810 Specifications (Operating)

Method 502.5 Procedure 2	Low Temperature	-20°C, 4 hours, ±3°C
Method 501.5 Procedure 2	High Temperature	+55°C, 4 hours, ±3°C
Method 507.5	Humidity	85%-95% RH without condensation, 24 hours/ cycle, conduct 10 cycles.
Method 514.6	Vibration	5-500Hz, Vertical 2.20Grms, 40mins x 3axis.
Method 516.6	Shock	20 Grms, 11ms, 3 axes.

MIL-STD-810 Specifications (None-Operating)

Method 502.5 Procedure 1	Low Temperature Storage	-33°C, 4 hours, change rate: ≤ 20°C/ Hour -15°C, 72hours (By request)
Method 501.5 Procedure 1	High Temperature Storage	+71°C, 4 hours, change rate: ≤ 20°C/ Hour +63°C, 240 hours (By request)
Method 514.6	Vibration	5-500Hz, Vertical 2.20Grms, 40mins x 3axis.
Method 516.6	Shock	20 Grms, 11ms, 3 axes.


MIL-STD-461

Conducted Emissions	CE102 basic curve	10kHz – 30MHz
Power Leads		
Radiated Susceptibility	RS103	1.5 MHz – 3GHz, 50 V/m equal for all frequencies
		2MHz – 80MHz, 50 V/m equal for all frequencies
		80MHz – 3GHz, 50 V/m equal for all frequencies
Electric Field		3GHz – 5GHz, 50 V/m equal for all frequencies
Electrostatic Discharge	EN 61000-4-2	Air DISCHARGE: 8 Kv, Contact discharge : 6kV
Electromagnetic compatibility	EN61000-4-4	Signal and DC Net: 1 kV
Electromagnetic compatibility	EN61000-4-5	Lead vs. ground potential 1Kv, ignal und DC Net: 1 kV
Radio disturbance	EN55022	Class A
Electromagnetic compatibility	EN61000-4-3	10V/m
Electromagnetic compatibility	EN 61000-4-5	Lead vs. ground potential 1Kv, ignal und DC Net: 0.5 kV

MIL-STD-1275 (Options)

Steady State	20V-33V
Surge Low	18V/500ms
Surge High	100V/500ms

Block Diagram

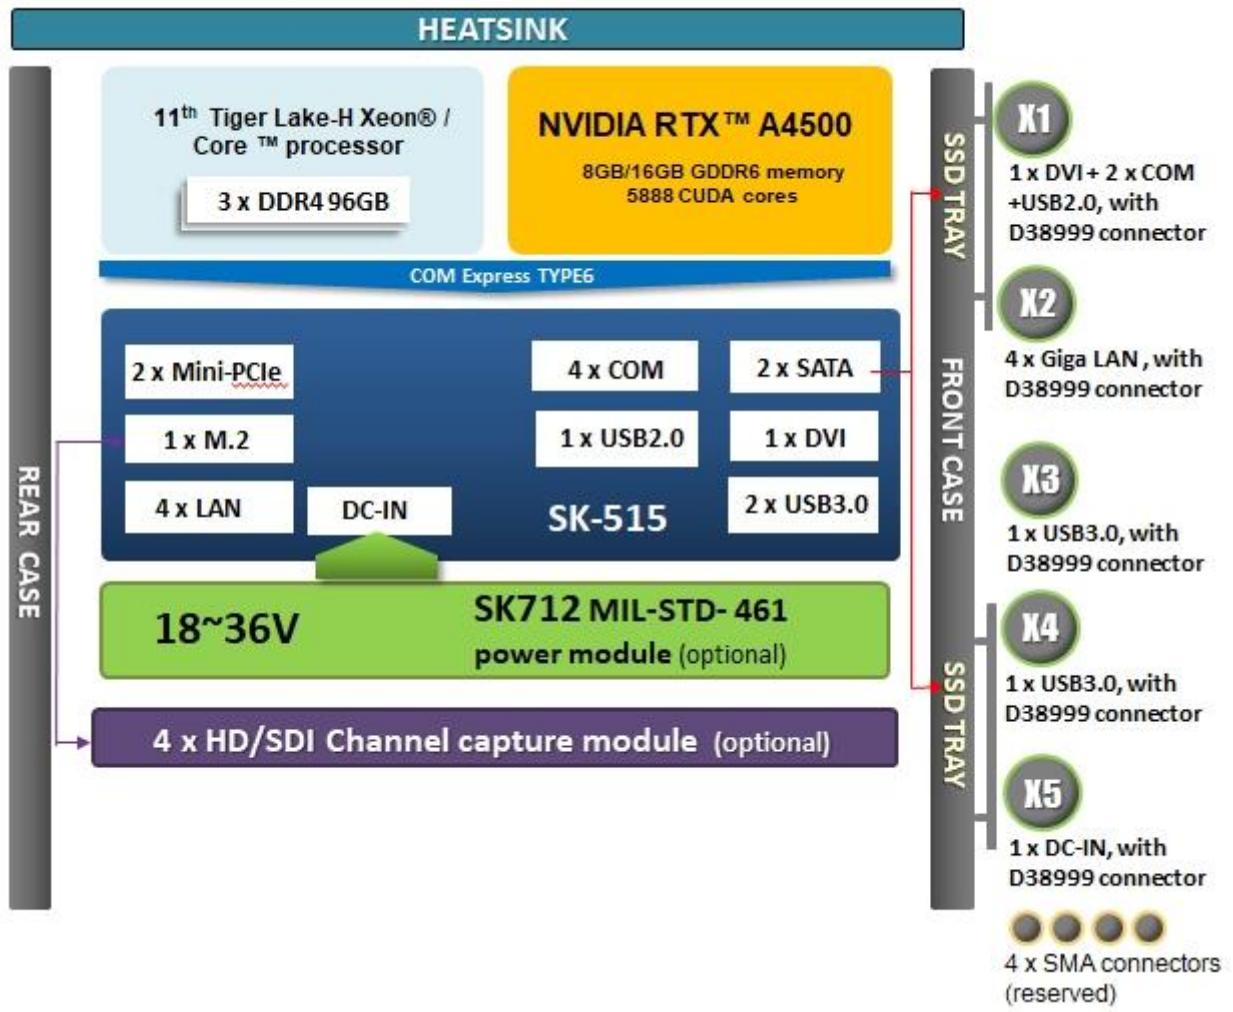

Appearance



1 x DVI
+
2 COM
+
USB 2.0

4 x GLAN

2 x USB 3.0

1 x DC-IN